

WEY® Knife Gate Valve Type VNB

2.4.20

DN 50–200



Standard Construction

Material acc. to data sheet 2.0.13

Body and upper construction with epoxy powder coating

Stainless steel part without coating

Flange drilling:
 PN10/16
 EN1092/ISO 7005


Face-to-face:
 EN 558-1/ISO 5752 part 20

Nominal pressure PN:
 DN 50–200 4 bar

Operating pressure:
 DN 50–125 1 bar
 DN 150–200 0,5 bar

For dead-end installation we recommend to use steel-enforced rubber gasket

Test acc.
 EN-12266-1, rate A

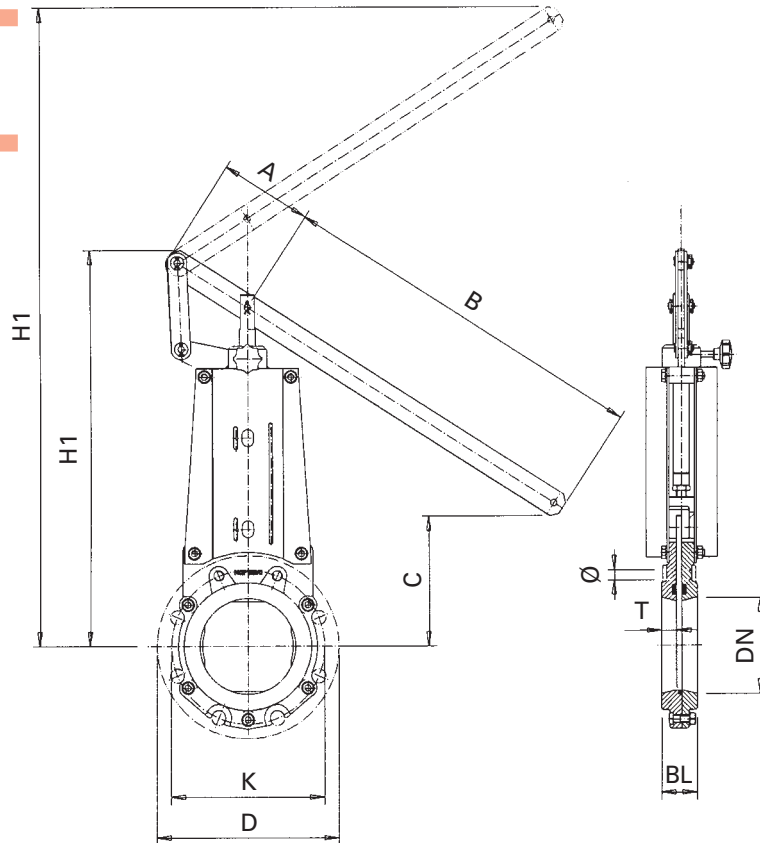

All information for reference only

Technical modifications reserved

| DN | D | K | BL | H | H ₁ | A | B | C | Ø | T | Qty screws | ⊕ | ⊕ | Weight kg |
|-----|-----|-----|----|-----|----------------|-----|-----|-----|-----|----|------------|---|---|-----------|
| 50 | 165 | 125 | 43 | 378 | 492 | 108 | 382 | 283 | M16 | 17 | 4 | 4 | – | 8 |
| 65 | 185 | 145 | 46 | 391 | 528 | 108 | 382 | 266 | M16 | 17 | 4 | 4 | – | 9 |
| 80 | 200 | 160 | 46 | 409 | 585 | 108 | 382 | 221 | M16 | 17 | 8 | 4 | 4 | 10 |
| 100 | 220 | 180 | 52 | 493 | 717 | 126 | 454 | 267 | M16 | 20 | 8 | 4 | 4 | 12 |
| 125 | 250 | 210 | 56 | 536 | 824 | 126 | 454 | 254 | M16 | 22 | 8 | 4 | 4 | 15 |
| 150 | 285 | 240 | 56 | 620 | 1147 | 136 | 916 | 57 | M20 | 21 | 8 | 4 | 4 | 23 |
| 200 | 340 | 295 | 60 | 727 | 1390 | 160 | 858 | 144 | M20 | 23 | 8 | 4 | 4 | 35 |